



GB04/4360



INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

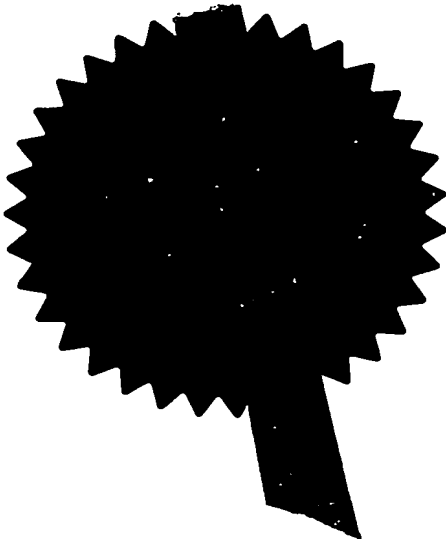


Signed

*Stephen Hordley*

Dated

10 November 2004

**BEST AVAILABLE COPY**

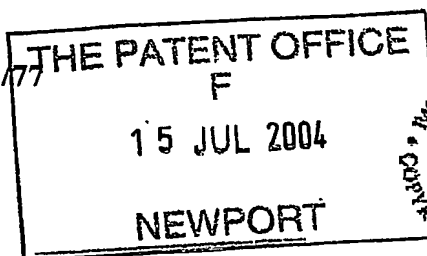15JUL04 E911383-7 002866  
P01/7700 0.00-0415796.2 CHEQUE

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

1. Your reference	FEMI / P30966GB		
2. Patent application number <i>(The Patent Office will fill this part in)</i>	0415796.2		
3. Full name, address and postcode of the or of each applicant <i>(underline all surnames)</i>	Femcare (Cyprus) Limited Meliza Court, 4th & 7th Floors 229 Archbishop Makarios III Avenue Limassol Cyprus		
Patents ADP number <i>(if you know it)</i>	8321911001		
If the applicant is a corporate body, give the country/state of its incorporation	Cyprus		
4. Title of the invention	APPLICATOR		
5. Name of your agent <i>(if you have one)</i>	ERIC POTTER CLARKSON PARK VIEW HOUSE 58 THE ROPEWALK NOTTINGHAM NG1 5DD		
"Address for service" in the United Kingdom to which all correspondence should be sent <i>(including the postcode)</i>			
Patents ADP number <i>(if you know it)</i>	1305010✓		
6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.	Country GB	Priority application number <i>(if you know it)</i> 0324106.4	Date of filing <i>(day / month / year)</i> 15/10/2003
7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute <i>(see note f)</i>	Number of earlier UK application	Date of filing <i>(day / month / year)</i>	
8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? Answer 'Yes' if	YES		
a) any applicant named in part 3 is not an inventor; or b) there is an inventor who is not named as an applicant; or c) any named applicant is a corporate body. Otherwise answer No <i>(See note d)</i>			

## Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 9 —

Claims(s) 3 —

Abstract 1 —

Drawing(s) 5

+ 5 *SW*

10. If you are also filing in any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) NO

Request for preliminary examination and search (Patents Form 9/77) NO

Request for substantive examination (Patents Form 10/77) NO

Any other documents (please specify) 23/77 Form 1

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

*Eric Potter Clarkson*  
**ERIC POTTER CLARKSON**

Date

14 July 2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

**0115 9552211**

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

### Applicator

The present invention relates to applicators and more particularly to applicators for insertion and closure of surgical clips.

5

Such clips may be for sterilisation or other medical, orthopaedic or surgical purposes where an intermediate position of an applicator or other appliance is required to be able to be accurately determined.

10 The term applicator is thus meant to include other appliances, particularly in the medical field, which involve a closure of a jaw or other similar gripping or squeezing action in which a specific intermediate position is required to be determined.

15 The present invention will now be described with reference to applicators for surgical clips. Except in open surgery it is necessary for the applicator to be inserted down a cannula for the more modern "key hole" surgery. Thus, the applicator or more precisely barrel portion of the applicator has to pass down the cannula loaded with a clip to be attached for occlusion of, for  
20 example a vas deferens or other tubular member.

With clips of the Filshie type such as disclosed in GB patent no. 2177748 excessive force applied to the clip during passage of the barrel down the cannula can result in clip failure. The clip could fall out of the barrel once it  
25 emerges from the cannula or alternatively the clip could fail by incorrect closure.

The present invention seeks to obviate this problem by providing a visual indication of an intermediate position of the applicator to ensure that there is

no over-closure of a clip during passage of an applicator barrel down a cannula.

The present invention therefore provides an applicator, said applicator  
5 comprising a barrel portion and a handle portion attached thereto, said  
barrel portion comprising means for holding a surgical clip and said handle  
comprising trigger means said trigger means being operative to effect  
closure of a surgical clip held within said barrel by movement of said  
trigger from a first position to a second position at which second position  
10 said applicator is operative to effect closure of said clip, in which said  
trigger is provided with a visual indicator means indicative of an  
intermediate trigger position at which intermediate position said surgical  
clip held in said barrel is closed to a half closed position.

15 Preferably said visual indication comprises an indentation on said trigger.

Alternatively said visual indication comprises a reduced section of said  
trigger.

20 In a further embodiment said visual indication comprises groove means in  
said trigger.

In said further embodiment said groove means may comprise means for  
engaging with a removable stop means said removable stop means being  
25 co-operative with a portion of said handle to prevent movement of said  
trigger past a predetermined position.

Preferably said groove means is present on both sides of said trigger.

Preferably said stop means may comprise a U shaped member which is designed in a first locking position to sit within said groove means and to protrude from said groove means to form said stop means.

- 5 Preferably said U shaped member comprises spring steel or similar material ensuring secure engagement with said groove means.

Preferably said U shaped member comprises means for gripping by a surgeon to effect removal of said U shaped member from said trigger  
10 enabling movement of said trigger past said predetermined position.

In a further embodiment the trigger may comprise two or more colours arranged to identify specific portions of the trigger.

- 15 In a further embodiment the handle includes a recess the trigger being pivotally mounted within the handle the trigger being movable into said recess when said trigger is operated, in which the trigger is dimensioned to have minimal clearance between itself and the recess over substantially the whole pivotal movement of the trigger.

20

Preferably the visual indicator means is provided by a change of surface texture at a defined position across the trigger.

- This change of surface texture will provide a visual indication of the defined  
25 position without any substantial variation of the surface dimension of the trigger.

The advantage of this design feature is that as the trigger is moved into and out of the handle there will be no appreciable gap between the trigger and the recess of the handle.

5 In surgical operation surgical gloves are worn and if there is any substantial gap between the trigger and the recess as the trigger is operated then there is a possibility of a glove catching between the trigger and the recess and being torn. This would create hygienic problems were it to occur and thus this feature is an important advantage of this embodiment.

10

The visual indication feature is further enhanced by the pressure felt by the surgeon on the trigger as the clip is partially closed.

15 The present invention also provides an applicator comprising a handle portion and a barrel portion, said barrel portion having gripping means at a distal end from said handle portion for gripping an object in which said handle portion includes trigger means operative to move said gripping means to grip an object and in which said handle and said trigger means are provided with visual indication means indicating a defined intermediate  
20 position of said trigger means.

Embodiments of the present invention will now be described by reference to the accompanying drawings in which: -

Figure 1 shows an applicator for clips of the Filshie type;

25 Figure 2 shown in greater detail the operating handle of the applicator of Figure 1 in accordance with the present invention;

Figure 3 shows a first embodiment of the visual indication means according to the present invention;

Figures 4a and 4b show a second embodiment with the trigger in two positions;

Figure 5 shows a first embodiment of the U shaped member comprising the stop means;

5 Figure 6 shows a second embodiment of the U shaped member comprising said stop means,

Figure 7 shows a further embodiment of the application according to the present invention in perspective view,

Figure 8 shows a partial cross section of the applicator of Figure 7  
10 illustrating the operation of the trigger and,

Figure 9 shows an exploded view of the applicator of Figure 7.

With reference now to the drawings an applicator 10 for applying clips of the Filshie type (as described in European patent application no.  
15 03075212.5) is shown. Such clips are of the hinged type and will be hereinafter referred to as Filshie clips.

The applicator 10 comprises a barrel portion 12 and a handle portion 14 including a trigger 16.

20

The applicator is designed to pass down a relatively small diameter cannula 18.

In order to do so it is necessary for the Filshie clip to pass down the cannula  
25 whilst in position in the applicator at the end of barrel 12. For a more detailed description reference is made to PCT application no.



A problem which arises is that if the clip is closed too far by application of trigger 16 then the clip may partially latch and the clip will not subsequently be able to be correctly attached.

- 5 To enable the surgeon to ascertain the correct position of the trigger to achieve the half closed position the trigger and handle combination is provided with visual indication means 20 as indicated in Figure 2.

10 This visual indication means preferably comprises an elongate linear feature easily discernible by a surgeon enabling the surgeon to readily set the trigger to a correct position.

15 The visual indicator may also comprise means for physically preventing further movement of the trigger past the correct semi-closed position of the clip this being illustrated hereinafter with reference to Figures 4, 5 and 6.

20 With reference to Figure 2 the visual indicator 20 marks a position at which with trigger 16 is moved on pivot 142 against for example return spring 140 the clip positioned at the distal end of barrel 12 will be in a semi-closed position.

Preferably the visual indicator line 20 will exist for a substantial distance over the trigger to provide a visual indication even when the trigger is being gripped by one or more of the digits of a surgeons hand.

25

In Figure 2 a section of the trigger along line A-A is shown for various embodiments illustrated in Figures 3 to 6.

In Figure 3 the trigger 14 is provided with a dual thickness shape shown at 202, 203 the change in thickness providing the visual indication 20.

5 In Figures 4a and 4b a groove 206, 208 is provided, preferably on both sides of the trigger.

The groove can provide the visual indication itself but in a specific embodiment a U shaped member 210 (see Figures 5 and 6) is inserted along the groove.

10

For illustrative purposes an edge portion 144, 146 of handle 14 is shown illustrating that when trigger 16 is pulled back the U shaped member 210 abuts the edges 144, 146 and physically prevents further movement of the trigger.

15

The U shaped member 210 is shown in a first embodiment in Figure 5 and preferably comprises a spring steel member allowing it to grip the grooves in trigger 16. Alternatively a suitable rigid plastic material may be used.

20 In Figure 6 the U shaped member is provided with gripping means 212 facilitating easy removal once capable closure of the Filshie clip is required.

The visual indication 20 may also be provided or enhanced by a change in colour of the trigger along line 20.

25

With reference now to Figure 7 in an alternative embodiment the trigger 16 comprises two separate surface features.

One part 162 (which could be the forward part on the rearward part) is provided with a surface texture whilst the other part 164 is a different surface texture which could for example be smooth. The advantage of this embodiment is that the trigger can be moulded from a single, preferably  
5 plastics, injection without use of a colouring agent in part of the trigger and also because the texturing can be made to raise or lower the surface by only a very small amount, possibly a few microns, the trigger can be made to slide into and out of the recess 1420 (shown exploded in Figure 9) with minimal clearance.

10

This removes the possibility of snagging or catching the surgical gloves of a surgeon whilst operating the applicator.

Additionally the amount of textured (or untextured) trigger left exposed as  
15 the trigger is pressed allows the surgeon a first appraisal of the level of clip closure and, as explained with reference to Figure 8 the applicator trigger will increasingly provide a feedback pressure as a clip is squeezed to a half closed position. Thus the surgeon can feel the clip pressure and look at the position of the textured line in the handle to provide visual and tactile  
20 approval of the position of the clip.

In Figure 8 the trigger 16 is movable on a pivot 1600 and drives the clip closure mechanism 1400 via a rack and pinion drive 1402.

25 As the trigger 16 moves in the direction of arrow 1610 to close the clip a feedback pressure is felt on the trigger 16 by the surgeon combining with the position of texture change line 163 to provide the surgeon with a tactile as well as visual indication.

Figure 9 shows the applicator in an exploded form to provide a further explanation of the embodiment of Figure 7.

## CLAIMS

1. An applicator or other surgical applicators, said applicator comprising a barrel portion and a handle portion attached thereto, said  
5 barrel portion comprising means for holding a surgical clip and said handle comprising trigger means said trigger means being operative to effect closure of a surgical clip held within said barrel by movement of said trigger from a first position to a second position at which second position said applicator is operative to effect closure of said clip in which said  
10 trigger is provided with a visual indicator means indicative of an intermediate trigger position at which intermediate position said surgical clip held in said barrel is closed to a half closed position.
2. An applicator as claimed in claim 1, in which said visual indication  
15 comprises an indentation on said trigger.
3. An applicator as claimed in claim 1, in which said visual indication comprises a reduced section of said trigger.
- 20 4. An applicator as claimed in claim 1, in which said visual indication comprises groove means in said trigger.
5. An applicator as claimed in claim 4, in which said groove means may comprise means for engaging with a removable stop means said  
25 removable stop means being co-operative with a portion of said handle to prevent movement of said trigger past a predetermined position.
6. An applicator as claimed in claim 5, in which said groove means is present on both sides of said trigger.

7. An applicator as claimed in claim 6, in which said stop means comprises a U shaped member which is designed in a first locking position to sit within said groove means and to protrude from said groove means to form said stop means.

5

8. An applicator as claimed in claim 7, in which said U shaped member comprises spring steel or similar material ensuring secure engagement with said groove means.

10

9. An applicator as claimed in claim 8, in which said U shaped member comprises means for gripping by a surgeon to effect removal of said U shaped member from said trigger enabling movement of said trigger past said predetermined position.

15

10. An applicator as claimed in and one of claims 1 to 9, in which the trigger may comprise two or more colours arranged to identify a specific position of the trigger.

20

11. An applicator as claimed in Claim 1 in which the handle includes a recess the trigger being pivotally mounted within said handle to be moveable within said recess when said trigger is operated in which the trigger is dimensioned to have minimal clearance between itself and the recess edges over substantially the whole pivotal movement of the trigger.

25

12. An application is claimed in Claim 11 in which the visual indicator is provided by a change in surface texture at a defined position across the trigger.

13. An applicator as claimed in Claim 12 in which trigger mechanism provides a feedback pressure as a clip is being moved from an open to a half closed position this feedback pressure providing a tactile sense to the surgeon which when combined with the visual indication provides  
5 additional information on the position of the clip.



14. An applicator comprising a handle portion and a barrel portion, said barrel portion having gripping means at a distal end from said handle portion for gripping an object in which said handle portion includes trigger  
10 means operative to move said gripping means to grip an object and in which said handle and said trigger means are provided with visual indication means indicating a defined intermediate position of said trigger means.

## ABSTRACT

A visual indication of an intermediate position is provided on an applicator to enable an operator to correctly position the trigger of the applicator to  
5 achieve a defined intermediate position:

figure 7



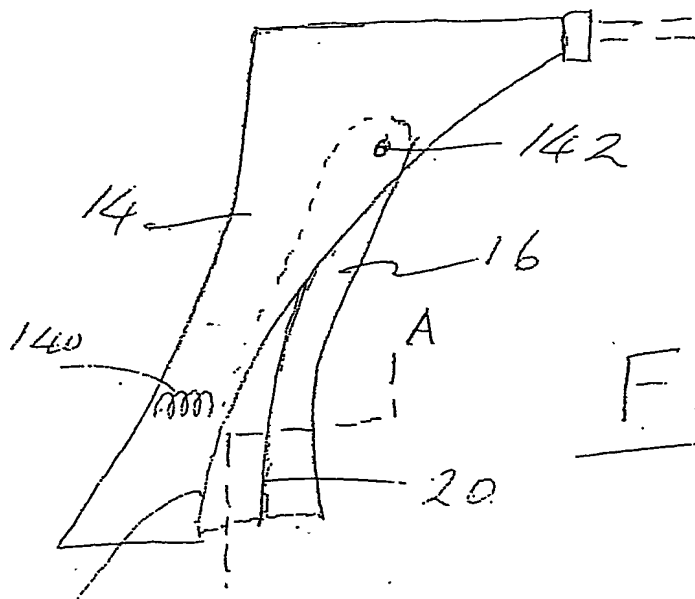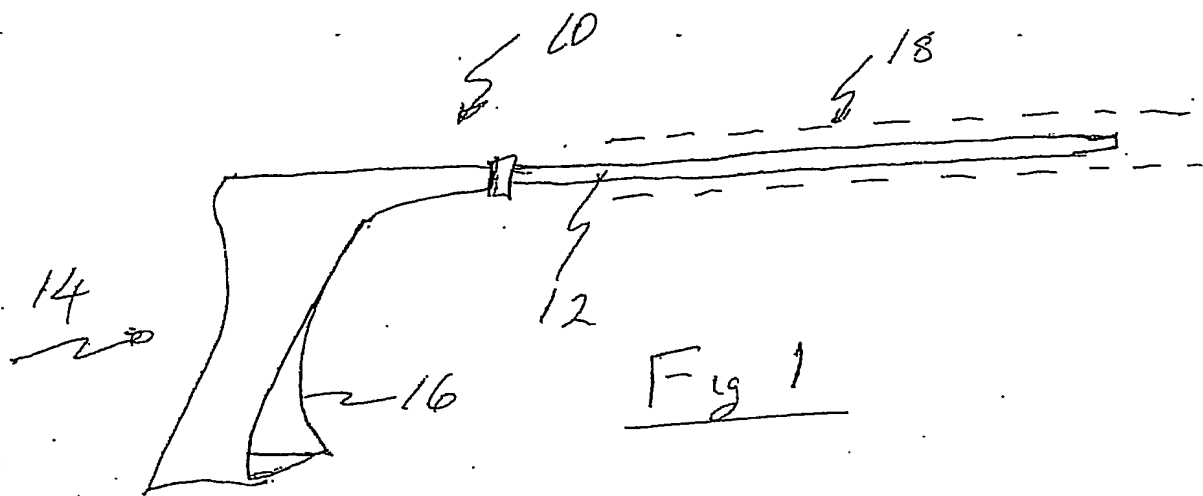

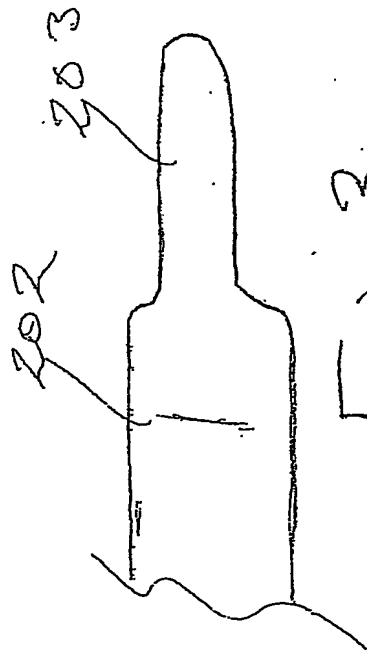


Fig 3

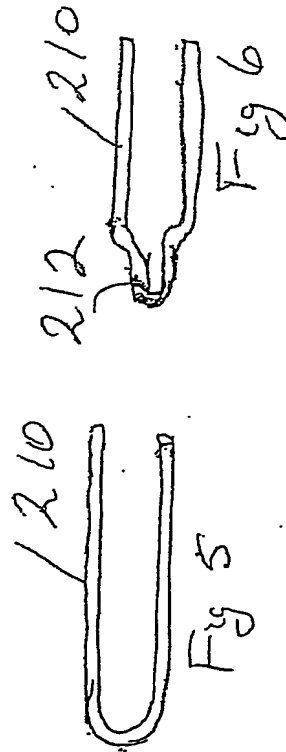


Fig 5



Fig 6

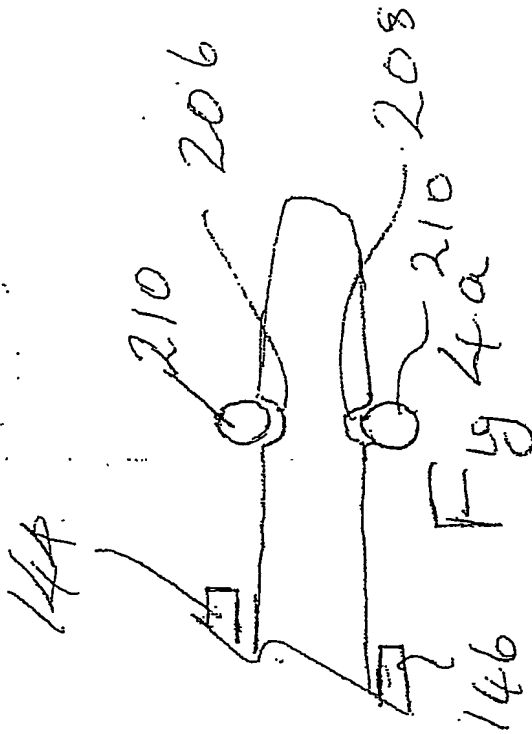


Fig 4a

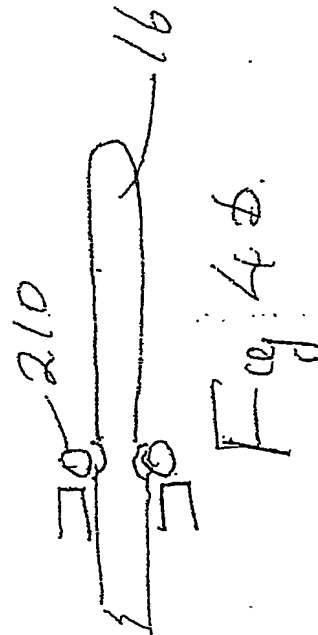


Fig 4b

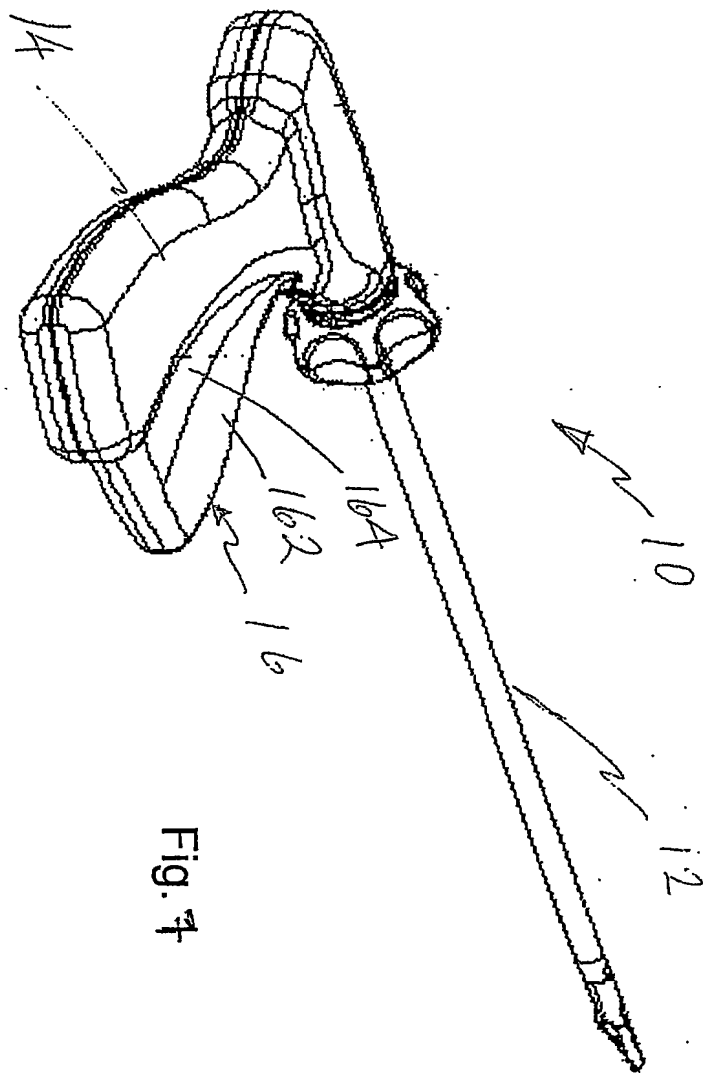


Fig. 4

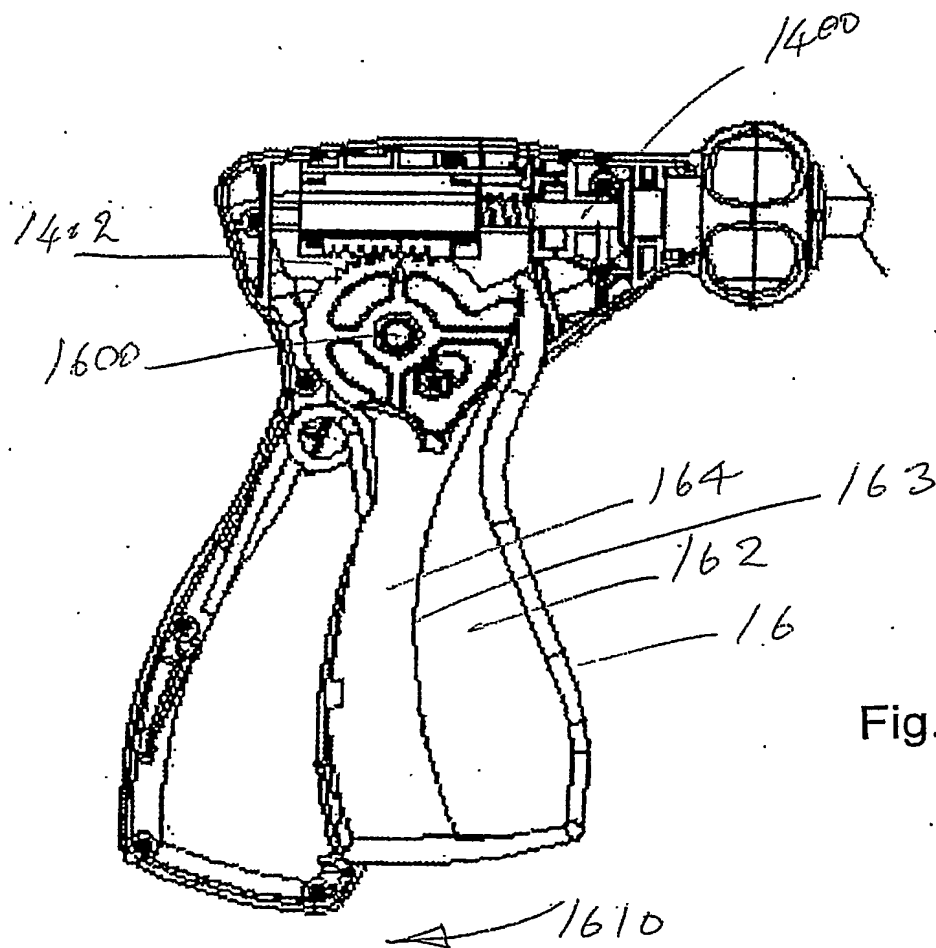


Fig. 2

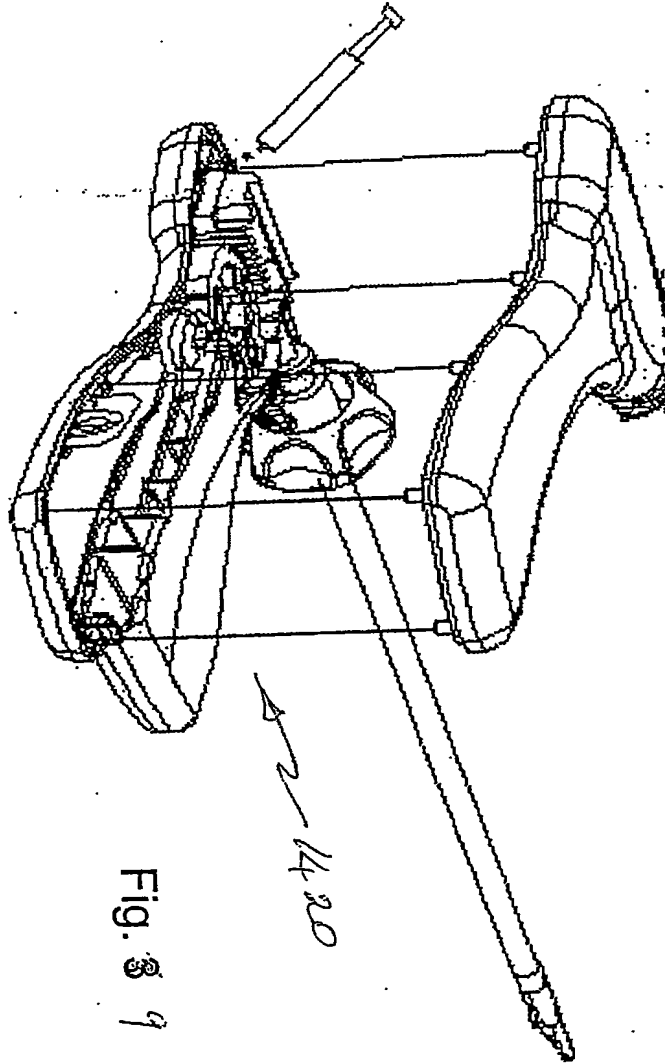


Fig. 3 9

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB04/004360

International filing date: 15 October 2004 (15.10.2004)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0415796.2  
Filing date: 15 July 2004 (15.07.2004)

Date of receipt at the International Bureau: 19 November 2004 (19.11.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**